

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number  
**WO 2005/040032 A1**

(51) International Patent Classification<sup>7</sup>: B66C 1/38, 1/36 // F16B 45/02

(21) International Application Number:  
PCT/NO2004/000325

(22) International Filing Date: 27 October 2004 (27.10.2004)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:  
20034842 28 October 2003 (28.10.2003) NO

(71) Applicant and

(72) Inventor: MOLAUG, Ole [NO/NO]; Tylebærholen 30,  
N-4340 Bryne (NO).


(74) Agent: HÅMSØ PATENTBYRÅ ANS; P.O. Box 171,  
N-4302 Sandnes (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A TOOL FOR CONNECTION AND DISCONNECTION OF CARGO

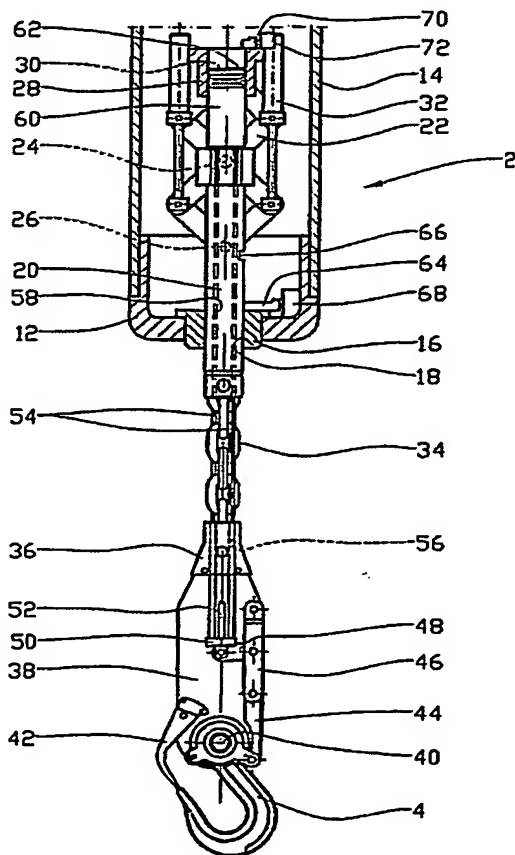

(57) Abstract: A tool (1) for connection and disconnection of a cargo item (8), in which the tool (1) comprises a suspension (2) and a lifting hook (4), and in which the lifting hook (4) is rotatably connected, about its suspension axis (40), to the suspension (2), wherein the lifting hook (4) is connected to an actuator (22, 28, 32, 70) via a transmission (44, 46, 48, 50, 54, 60), the actuator (22, 28, 32, 70) being arranged to allow it to rotate the lifting hook (4) about the suspension axis (40).

WO 2005/040032 A1



**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*